


| | | |
|----------------|----|-------|
| Mark X if none | | |
| | | |
| Sample | | |
| DD1000.1 | FA | 11P27 |

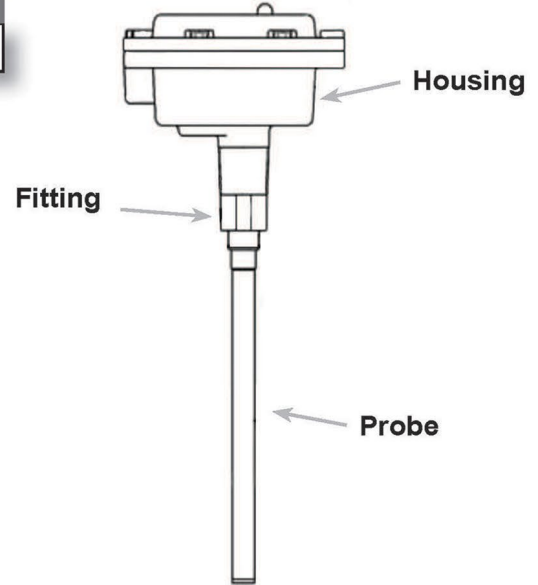

Probes (1, 2)

- 03P71: P71 - Unshielded, Bare Stainless Steel Probe - 3 In.
- 04P28: P28 - Unshielded, Bare Stainless Steel Probe - 4 In.
- 06P62: P62 - Unshielded, Bare Stainless Steel Probe - 6 In.
- 11P27: P27 - Unshielded, Bare Stainless Steel Probe - 10.63 In.
- 18P29: P29 - Unshielded, Bare Stainless Steel Probe - 18 In.
- 24P30: P30 - Unshielded, Bare Stainless Steel Probe - 24 In.
- 30P57: P57 - Unshielded, Bare Stainless Steel Probe - 30 In.
- 36P56: P56 - Unshielded, Bare Stainless Steel Probe - 36 In.
- 48P31: P31 - Unshielded, Bare Stainless Steel Probe - 48 In.
- 72P32: P32 - Unshielded, Bare Stainless Steel Probe - 72 In.
- 96P33: P33 - Unshielded, Bare Stainless Steel Probe - 96 In.
- 11P39: P39 - Bare Stainless Steel Probe - 10.19"
(Teflon insert for high temperature)
- 06P40: P40 - Bare Stainless Steel Probe - 6"
(Teflon insert for high temperature)
- XXP34: P34 - Custom Length Unshielded, Bare Stainless Steel Probe - XX in.

Fittings (1, 2)

- FA: FA - 3/4" NPT SS fitting for bare & Delrin sleeved
- FB: FB - 1.25" NPT SS fitting bare & Delrin sleeved
- FC: FC - 1" Sanitary SS fitting for 5/8" bare & Delrin

Remote Housing

- DD1000.1: Dust Detect 1000 115 VAC
- DD1000.2: Dust Detect 1000 230 VAC

Before placing an order, validate your selections with a sales representative,
as not all options are offered for every configuration.

| Description | CODE | Part No. |
|---|----------|----------|
| POWER PACS | | |
| DD1000-115VAC - Dust Detect power pac single piece, triboelectric broken bag detector, 115 VAC | DD1000.1 | |
| DD1000-230VAC - Dust Detect power pac single piece, triboelectric broken bag detector, 230 VAC | DD1000.2 | |
| FITTINGS | | |
| FA - 3/4" NPT stainless steel fitting for bare and Delrin sleeved probes | FA | 175-0083 |
| FB - 1-1/4" NPT stainless steel fitting for bare and Delrin sleeved probes | FB | 175-0082 |
| FC - 1" Food grade stainless steel fitting for 5/8" bare and Delrin sleeved probes, and for use with tri-clover style clamp (not 3-A) | FC | 175-0093 |
| PROBES | | |
| P71 - Unshielded, bare stainless steel probe - 3" | 03P71 | 530-0199 |
| P28 - Unshielded, bare stainless steel probe - 4" | 04P28 | 530-0267 |
| P62 - Unshielded, bare stainless steel probe - 6" | 06P62 | 530-0202 |
| P27 - Unshielded, bare stainless steel probe - 10.63" | 11P27 | 530-0198 |
| P29 - Unshielded, bare stainless steel probe - 18" | 18P29 | 530-0268 |
| P30 - Unshielded, bare stainless steel probe - 24" | 24P30 | 530-0234 |
| P57 - Unshielded, bare stainless steel probe - 30" | 30P57 | 530-0265 |
| P56 - Unshielded, bare stainless steel probe - 36" | 36P56 | 530-0266 |
| P31 - Unshielded, bare stainless steel probe - 48" | 48P31 | 530-0235 |
| P32 - Unshielded, bare stainless steel probe - 72" | 72P32 | 530-0236 |
| P33 - Unshielded, bare stainless steel probe - 96" | 96P33 | 530-0237 |
| P39 - 10.19" Bare stainless steel probe with Teflon insert for high temperatures. | 11P39 | 530-0227 |
| P40 - 6" Bare stainless steel probe with Teflon insert for high temperatures. | 06P40 | 530-0864 |
| P34 - Custom length, unshielded, bare stainless steel probe. Maximum length 96" | XXP34 | 530-0200 |